

DID YOU KNOW?

about our...




**NEW
PRODUCT**

Grade 80 Master Link Assembly

Master link assembly allows up to four leg sling lifts with a variety of sling materials.

CHAIN MASTER LINK ASSEMBLY POWDER COAT / HEC / GRADE 80

Part	Qfind	Chain Size 3 or 4 leg lift (mm)	WLL (tonne)	BL (tonne)
ULCL08PMA-07	CMA7	7	5.5	22.0
ULCL08PMA-08	CMA8	8	6.65	26.6
ULCL08PMA-10	CMA10	10	9.40	37.6
ULCL08PMA-13	CMA13	13	14.20	56.8
ULCL08PMA-16	CMA16	16	22.30	89.2
ULCL08PMA-20	CMA20	20	33.50	134.0
ULCL08PMA-22	CMA22	22	40.80	163.2
ULCL08PMA-26	CMA26	26	56.80	227.2

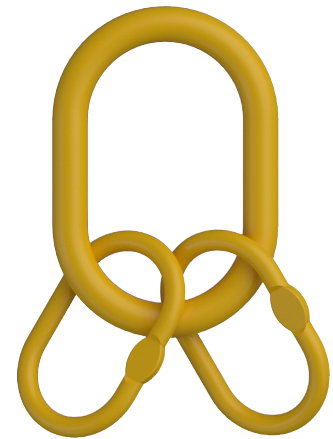

MARKINGS:

- **CE** (European Conformity)
- **WLL** (Working Load Limit)
- **Trace Code** (linked to certificate online)
- **Manufacturer's mark**

APPLICATIONS

- Use with Grade 80 lifting components
- Lifting with G80 2-4 leg chain slings, wire rope and synthetic slings

FEATURES

- Conforms to AS 3779
- 100% magnaflux crack detection
- Working load limit for three or four leg lifting between 0-45 degrees



You can download this
Test Certificate and/or
Report from our website:

hobson.com.au

Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au **QUALITY FASTENERS SINCE 1935**

